WL-1000CAM

Wireless-G motion JPEG IP Camera

The WL-1000CAM is an advanced IP camera featuring motion JPEG that offers great video imaging. The camera includes support for UPnP which makes seamless device connection and easy installation.

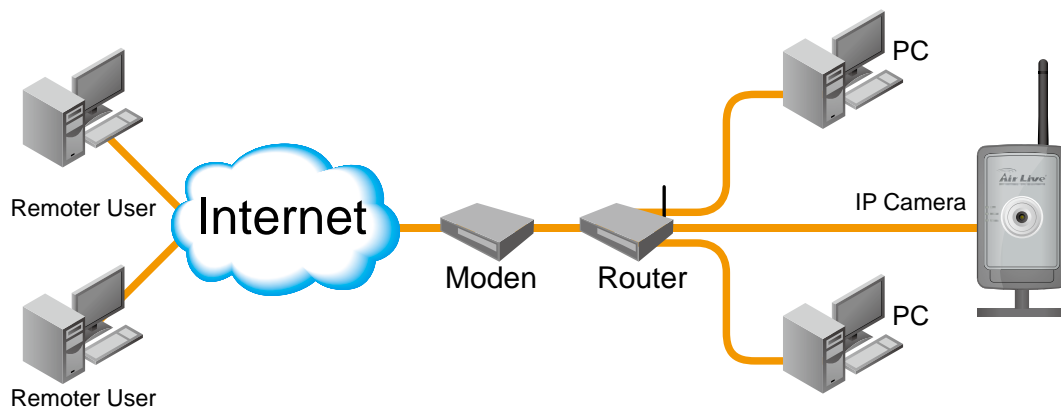MJPEG   802.11g   Motion-Detection   True Colour

Full Feature 54Mbps Wireless Camera

AirLive Wireless Internet IP Camera is designed for Home and Enterprise users to enjoy the security and home networking entertainment advantages. It is simple to use with plug-n-play installation and wireless operation so you can install the camera anywhere. The web based configuration allows viewing of the images from the Internet in real time! The 802.11g now allows the camera to operate at 20FPS (QVGA) speed and up to 640x480(10fps) resolution, it makes the video amazingly life like for monitoring or archive purpose.

Windows-based and Web-based Monitoring Utility

These tools allow users to access the Internet Camera from a remote site via Intranet or Internet. They also allow users to make configuration including image monitoring, recording images to a hard drive, viewing up to 4 cameras on one screen, snapshots and many others.

Remoter User   Internet   Moden   Router   PC   IP Camera   PC   Remoter User
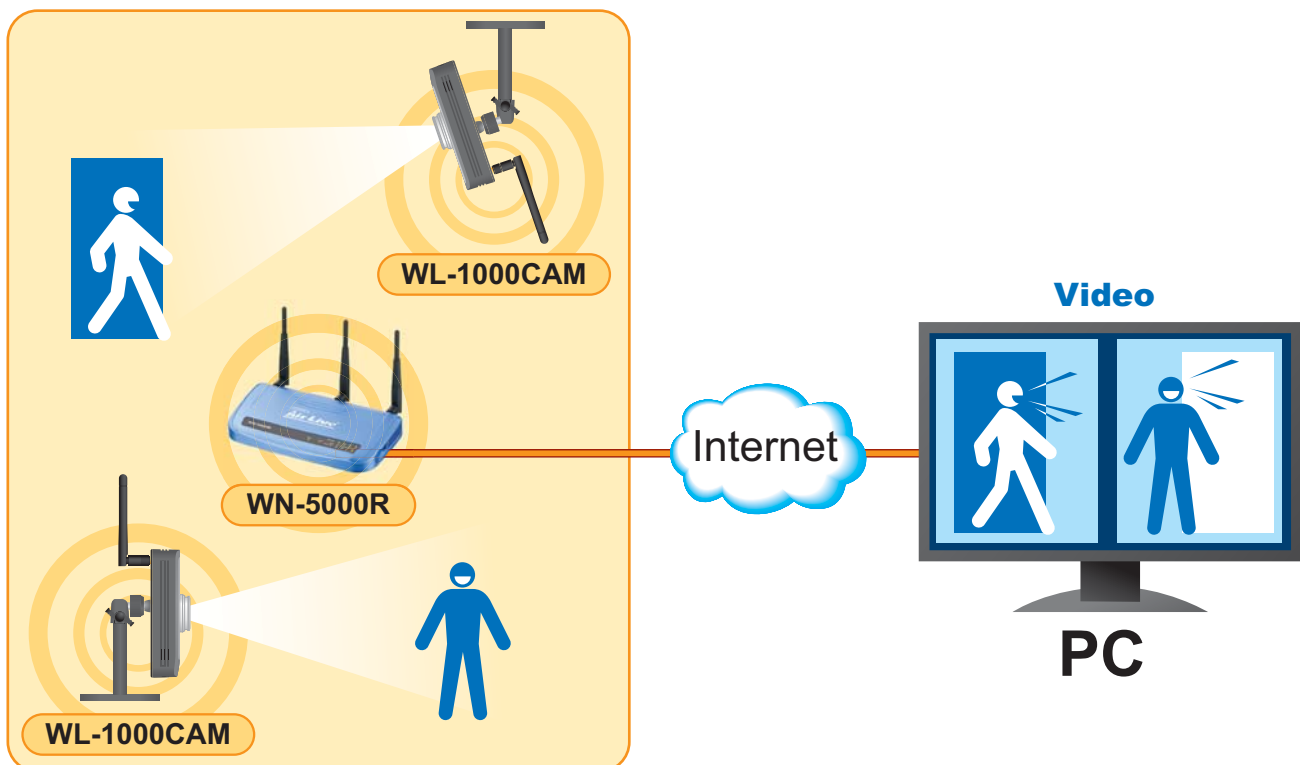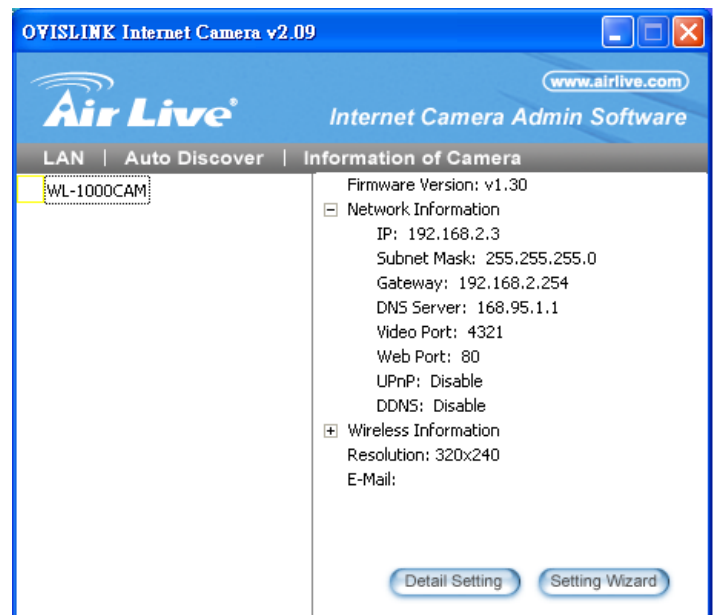
www.airlive.com

Versatile Application

The camera is equipped with many advance functions for all type of applications. The motion detection function will trigger the auto record function and send users an email notification. It can even attach up to 3 images in the email so users will know the situation instantly without having to visit the site. For home users, you can monitor your young children from remote site to ensure their safety. With 640x480 resolution, you no longer have to second guess about the image on the screen.

Users can use the camera for video surveillance function. This camera also supports TCP/IP networking, SMTP e-mail, HTTP and other Internet related protocols. Another advanced feature for this camera is its Powerful Camera Viewer application software for image capturing and video recording and it support both ActiveX control and Java applet for Internet Explorer. It allows your PC to manage up to 4 video cameras at the same time in motion sensor, scheduled or always recording mode.

OVISLINK Internet Camera v2.09

Air Live ®
www.airlive.com
Internet Camera Admin Software

LAN | Auto Discover | Information of Camera

WL-1000CAM

Firmware Version: v1.30
☐ Network Information
   IP: 192.168.2.3
   Subnet Mask: 255.255.255.0
   Gateway: 192.168.2.254
   DNS Server: 168.95.1.1
   Video Port: 4321
   Web Port: 80
   UPnP: Disable
   DDNS: Disable
☐ Wireless Information
   Resolution: 320x240
   E-Mail:

Detail Setting   Setting Wizard

WL-1000CAM

WN-5000R

WL-1000CAM

Internet

Video

PC

www.airlive.com

Specifications

Product

- 802.11g Wireless LAN Internet Camera

CPU+DSP+RF

- Realtek RTL8650B + Topro6811 + Ralink RT2561

Flash

- 2MB Flash

RAM

- 16MB SDRAM

Image Sensor

- Micron MI-360 300,000 Pixels CMOS Sensor

Lens

- Manual Focus, F=2.8mm

LAN Port

- 10/100M UTP Port x 1

Power

- 12V, 1A Power Adaptor

Dimension

- 113mm x 80mm x 43mm

Temperature

- 0~45℃

Humidity

- 10~90% (Non-Condensing)

Certification

- FCC Class B, CE Mark

Ordering Information:

WL-1000CAM   Wireless-G motion JPEG IP Camera

www.airlive.com